




applicazioni:
applications:

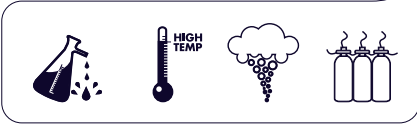

尚府料號：T5

	DN	Ø INTERNO / INSIDE Ø	Ø ESTERNO / OUTSIDE Ø	ESERCIZIO (20°C) SERVICE (68°F)	SCOPPIO (20°C) BURST (68°F)	RAGGIO MIN.CURV MIN. BEND RADIUS	PESI / WEIGHTS
		(mm)	(mm)	(bar)	(bar)	(mm)	(gr/mt)
UTP	1/4	6,5	10,5	360	1100	38,1	160
UTP	5/16	8	12,2	360	1100	63,5	267
UTP	3/8	10	15,2	360	1100	73,7	357
UTP	1/2	12,7	18,1	360	1100	83,8	481
UTP	5/8	15,6	24,6	360	1100	101,6	981
UTP	3/4	19	28	360	1100	120	1263
UTP	1	25	34,7	360	1100	127	1516
UTP	1 1/4	32	44	275	825	305	2496
UTP	1 1/2	38	52	275	825	355	3388

DESCRIZIONE:
Ultra pressure è un tubo ad alta pressione, interno in ptfe liscio conduttivo con fitta calza in acciaio AISI 304 in grado di raggiungere temperature elevate per applicazioni gravose

CARATTERISTICHE:
Basso coefficiente di attrito per materiali viscosi
Tubo post sinterizzato per trasferimento di gas compresso
Bassa espansione volumetrica per sistemi di pompaggio alta pressione

DESCRIPTION:
Ultra pressure is an high pressure hose , inner smooth ptfe tube densely packed stainless steel braided to acheive elevated pressure ratings for robust applications.

FEATURES:
Low coefficient of friction for conveying viscous materials
Post sintered tube for compressed gas transfer
Low volumetric expansion for high pressure pump systems

