




Mit O-Ring Abdichtung - NBR
Auf Anfrage: FPM
Passend in 24°-Innenkonus
Bohrungsform W DIN 3861

With O-ring Sealing - NBR
On request: FPM
Matching Type 24°-Inside Tapers
Bore Type W DIN 3861

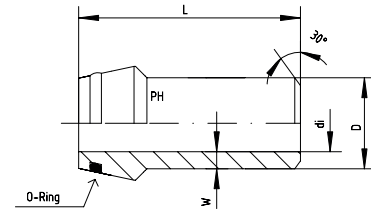

Reihe / Series L

Druck Pressure	D x W D x W	Ca. Maße Approx. Dimensions	O-Ring O-ring	Bemerkungen Notes	Bestellzeichen Order-Code
PN		L d1			
270	15 x 1,5	36,0 12,0	12,0 x 2,0		SKV-15x1,5
323	15 x 2	36,0 11,0	12,0 x 2,0		SKV-15x2
393	15 x 2,5	36,0 10,0	12,0 x 2,0		SKV-15x2,5
225	18 x 1,5	37,0 15,0	16,0 x 1,5		SKV-18x1,5
300	18 x 2	37,0 14,0	15,0 x 2,0		SKV-18x2
335	18 x 2,5	37,0 13,0	15,0 x 2,0		SKV-18x2,5
245	22 x 2	38,5 18,0	19,0 x 2,0		SKV-22x2
280	22 x 2,5	38,5 17,0	19,0 x 2,0		SKV-22x2,5
328	22 x 3	38,5 16,0	19,0 x 2,0		SKV-22x3
193	28 x 2	41,5 24,0	25,0 x 2,0		SKV-28x2
224	28 x 2,5	41,5 23,0	25,0 x 2,0		SKV-28x2,5
265	28 x 3	41,5 22,0	25,0 x 2,0		SKV-28x3
154	35 x 2	47,0 31,0	32,0 x 2,5		SKV-35x2
193	35 x 2,5	47,0 30,0	32,0 x 2,5		SKV-35x2,5
231	35 x 3	47,0 29,0	32,0 x 2,5		SKV-35x3
249	35 x 3,5	47,0 28,0	32,0 x 2,5		SKV-35x3,5
249	35 x 4	47,0 27,0	32,0 x 2,5		SKV-35x4
129	42 x 2	47,0 38,0	39,0 x 1,5		SKV-42x2
150	42 x 2,5	47,0 37,0	39,0 x 1,5		SKV-42x2,5
182	42 x 3	47,0 36,0	38,0 x 2,5		SKV-42x3
238	42 x 4	47,0 34,0	38,0 x 2,5		SKV-42x4