

W4

12mm S-band Worm-drive Hose clip

DIN: 3017 Heavy series

Asfa-S W4 Hose Clip (12 mm bandwidth)

Information	Ø Application mm	Referencie W4	L	s +0,5	h	a +0,4 -0,2	b max.	Max. Values* Torque (Nm)	Max. Values* Pressure (Bars)	Box Quantity	Packing
The ASFA-S W4 hose clip combines an innovative housing and a sturdy 12mm band which together make this a high performance hose clip. The cold-formed stamped band thread, smoothed on the underside, combined with beveled band-edges protects the hose from any damage. The ASFA-S W4 hose clip complies fully with the DIN 3017 norm and also with the RoHS directive EU 20032/95/EC dated 1st July 2006. Crafted entirely from AISI-304 stainless steel, this clip is ideally for use in marine applications or in any industrial assemblies where high levels of corrosion resistance are required.	16-27	03014730	29,6	0,8	11	12,2	18	4,6	45	50	400
	20-32	03014510	29,6	0,8	11	12,2	18	5,6	45	50	400
	25-40	03014529	29,6	0,8	11	12,2	18	5,6	40	50	400
	30-45	03014748	29,6	0,8	11	12,2	18	5,6	35	50	400
	32-50	03014537	29,6	0,8	11	12,2	18	6,5	35	50	400
	40-60	03014545	29,6	0,8	11	12,2	18	6,5	30	50	400
	50-70	03014553	31,6	0,8	11	12,2	18	7,0	25	50	400
	60-80	03014561	31,6	0,8	11	12,2	18	7,0	20	50	50
	70-90	03014570	31,6	0,8	11	12,2	18	7,0	17	50	50
	80-100	03014588	31,6	0,8	11	12,2	18	7,0	14	25	200
	90-110	03014596	31,6	0,8	11	12,2	18	7,0	12	25	200
	100-120	03014609	31,6	0,8	11	12,2	18	7,0	10	25	200
	110-130	03014617	31,6	0,8	11	12,2	18	7,0	8	25	25
	120-140	03014625	34,6	0,8	11	12,2	18	7,0	7	25	25
	130-150	03014633	34,6	0,8	11	12,2	18	7,0	6	25	25
	140-160	03014641	34,6	0,8	11	12,2	18	7,0	5	25	25
	150-170	03014650	34,6	0,8	11	12,2	18	7,0	4	25	25
	160-180	03014668	34,6	0,8	11	12,2	18	7,0	3	25	25
	170-190	03014676	34,6	0,8	11	12,2	18	7,0	2	10	10
	180-200	03014684	34,6	0,8	11	12,2	18	7,0	2	10	10
	190-210	03014692	34,6	0,8	11	12,2	18	7,0	1,8	10	10
	200-220	03014705	34,6	0,8	11	12,2	18	7,0	1,8	10	10
	210-230	03014713	34,6	0,8	11	12,2	18	7,0	1,6	10	10
	220-240	03014721	34,6	0,8	11	12,2	18	7,0	1,6	10	10

*The maximum application pressure can vary depending on the type of hose used and the geometry of the coupling.

Patented Worldwide


W4 Materials

Screw:

AISI-304 Cu
Stainless steel (A2)

Band and Housing:

X5CrNi1810
Stainless steel
(DIN 1.4301)
(AISI-304) (A2)

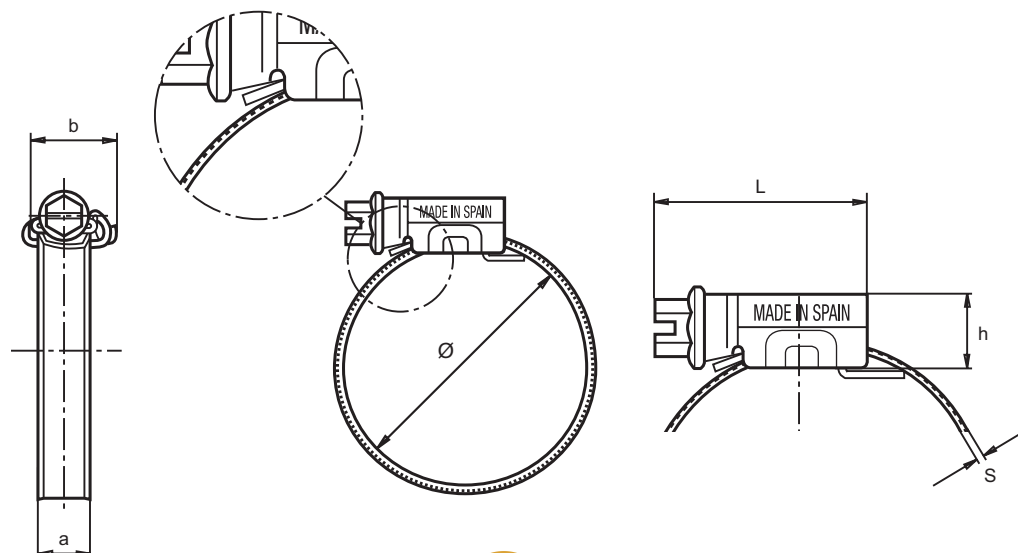

W4

9mm L-band Worm-drive Hose clip

DIN: 3017 Light series

Asfa-L W4 Hose Clip (9 mm bandwidth)

Information

Thanks to the exclusive design of the housing, the ASFA-L W4 hose clip has excellent performance while being at the same time very compact. The cold-formed stamped band thread, smoothed on the underside, combined with beveled band-edges protects the hose from damage.

The ASFA-L W4 hose clip complies fully with the DIN 3017 norm and also with the RoHS directive EU 20032/95/EC dated 1st July 2006.

This clip is ideally for use in the marine industry, due to the corrosion resistance offered by the use of AISI-304 stainless steel in its manufacture.

Ø Application mm	Reference W4	L max.	s ± 0,05	h max.	a ± 0,3 0,2	b max.	Max. Values* Torque Nm	Max. Values* Pressure (Bars)	Box Quantity	Packing
8-12	03014000	18,0	0,6	9,5	7,5	11,5	1,5	40	200	800
8-16	03014019	22,1	0,6	10	9	14	3,0	45	200	800
12-22	03014027	22,1	0,6	10	9	14	3,0	45	200	800
16-27	03014035	23,6	0,7	10	9	14	3,5	42	200	800
20-32	03014043	23,6	0,7	10	9	14	3,5	36	200	800
25-40	03014051	25,6	0,7	10	9	14	4,0	32	100	800
30-45	03014060	25,6	0,7	10	9	14	4,0	28	100	800
32-50	03014078	25,6	0,7	10	9	14	4,0	24	100	800
40-60	03014086	25,6	0,7	10	9	14	4,0	19	100	400
50-70	03014094	29,6	0,7	10	9	14	4,0	17	100	100
60-80	03014107	29,6	0,7	10	9	14	4,0	15	100	100
70-90	03014115	29,6	0,7	10	9	14	4,0	13	50	400
80-100	03014123	29,6	0,7	10	9	14	4,0	11	50	400
90-110	03014140	29,6	0,7	10	9	14	4,0	10	25	200
100-120	03014158	29,6	0,7	10	9	14	4,0	9	25	200
110-130	03014166	29,6	0,7	10	9	14	4,0	8	25	25
120-140	03014174	29,6	0,7	10	9	14	4,0	7	25	25
130-150	03014182	29,6	0,7	10	9	14	4,0	6	25	25
140-160	03014190	29,6	0,7	10	9	14	4,0	5	25	25

*The maximum application pressure can vary depending on the type of hose used and the geometry of the coupling.

Patented Worldwide.

W4 Materials

Screw:

AISI-304 Cu (A2)
Stainless steel

Band and Housing:

X5CrNi1810
Stainless steel
(DIN 1.4301)
(AISI-304) (A2)

