


Sandblast

60mm³



TUBE : ABRASION RESISTANT, ANTISTATIC NATURAL RUBBER.
 REINFORCEMENT : HIGH TENSILE SYNTHETIC TEXTILE AND ANTISTATIC COPPER WIRE.
 COVER : ABRASION, OZONE AND WEATHER RESISTANT PIN-PRICKED NATURAL AND SYNTHETIC RUBBER.
 APPLICATION : FOR CLEANING AND BLASTING METAL, STONE AND CONCRETE SURFACES.

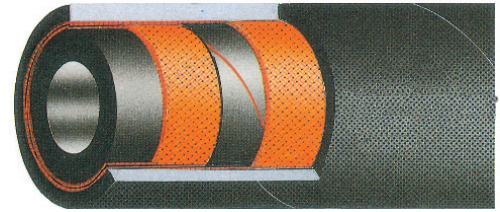

SEELE : HOCH ABRIEBFEST, LEITFÄHIG, NATURGUMMI.
 EINLAGE : HOCHZUGFESTE SYNTHETISCHE TEXTILEINLAGE UND ANTISTATISCHER KUPFERLITZE.
 DECKE : OZON- UND WITTERUNGSBESTÄNDIGER, ABRIEBSFESTER, SPEZIELLER NATUR - SYNTHETISCHER GUMMI, GEPRICKT
 ANWENDUNG : ZUR REINIGUNG UND STRAHLEN VON METAL-, STEIN- UND BETON OBERFLÄCHEN



SOTTOSTRATO : GOMMA NATURALE ANTISTATICA, RESISTENTE ALL'ABRASIONE.
 RINFORZO : INSERZIONI TESSILI AD ALTA TENACITÀ CON CORDICELLA DI RAME ANTISTATICA.
 COPERTURA : GOMMA NATURALE E SINTETICA MICRO-FORATA, RESISTENTE ALL'ABRASIONE, ALL'OZONO ED AGLI AGENTI ATMOSFERICI.
 IMPIEGO : PER MANDATA DI MATERIALI ABRASIVI NEGLI IMPIANTI DI SABBIA TURA E GRANIGLIA.



TUBE : CAOUTCHOUC NATUREL CONDUCTEUR, RESISTANT A L'ABRASION.
 RENFORCEMENT : NSERTION TEXTILE HAUTE TENACITE ET FIL DE MASSE ANTISTATIQUE.
 REVETEMENT : CAOUTCHOUC SYNTHETIQUE ET NATUREL, MICROPERFORE, RESISTANT A L'ABRASION, A L'OZONE ET AUX AGENTS ATMOSPHERIQUES.
 APPLICATION : UTILISE DANS LES MACHINES DE SABLAGE POUR NETTOYER LES SURFACES METALLIQUES, FAÇADES ETC.

ID		OD		WP		BP		BR/r	W	L
inch	mm	mm	mm	bar	psi	bar	psi	mm	g/m	m
1/2"	12.7	25	12	174	36	522	125	414	40-46-61	
1/2"	12.7	27	12	174	36	522	125	495	40-46-61	
5/8"	16	28	12	174	36	522	150	476	40-46-61	
5/8"	16	30	12	174	36	522	150	578	40-46-61	
3/4"	19	30	12	174	36	522	190	486	40-46-61	
3/4"	19	31	12	174	36	522	190	530	40-46-61	
3/4"	19	33	12	174	36	522	190	653	40-46-61	
1"	25.4	39	12	174	36	522	250	813	40-46-61	
1 1/4"	32	48	12	174	36	522	320	1160	40-46-61	
1 1/2"	38	54	12	174	36	522	380	1337	40-46-61	
1 1/2"	38	56	12	174	36	522	380	1531	40-46-61	
1 3/4"	44.5	60	12	174	36	522	445	1468	40-46-61	
1 3/4"	44.5	63	12	174	36	522	445	1820	40-46-61	
2"	50.8	69	12	174	36	522	500	2030	40-46-61	
2"	50.8	73	12	174	36	522	500	2484	40-46-61	
2 1/2"	63.5	82	12	174	36	522	630	2626	40-46-61	
3"	76.2	96	12	174	36	522	760	3090	40-46-61	
4"	101.6	122	12	174	36	522	1000	4220	40-46-61	



-40°C / + 70°C
 -40°F / +158°F

MARKING / BESCHRIFTUNG / MARCATURA / MARQUAGE: **TRANSFER TAPE OR EMBOSSED**



NORMS NORMEN NORME NORMES	TS 5928 EN ISO 3861 EN ISO 3861 ISO 1307	COLOUR FARBEN COLORI COULEUR	
------------------------------------	--	---------------------------------------	--



EF 624 - SHOT BLASTING HOSE W.P. 12 BAR



Construction

- Core** Black colour, Synthetic and natural rubber blend resistant to abrasion
- Reinforcement** High Tensile Synthetic Textile Cord with 2 cross anti static wire
- Cover** Black colour, Synthetic rubber resistant to ozone, weather and abrasion
- Application** Suitably designed long lasting heavy duty hose for use in sand, metal grits and foundry waste with conductive rubber compound to ensure static electricity dissipation abrasion loss of the tube according to ISO 4649: 50±5mm³

Item Code	Dash Size	ID		OD		WP		BP		W kg/m
		inch	mm	inch	mm	psi	bar	psi	bar	
EF624-08	-08	1/2	12.7	1.06	27.0	175	12	525	36	0.61
EF624-12	-12	3/4	19.0	1.34	34.0	175	12	525	36	0.80
EF624-16	-16	1	25.0	1.57	40.0	175	12	525	36	0.97
EF624-20	-20	1.1/4	32.0	1.89	48.0	175	12	525	36	1.32
EF624-24	-24	1.1/2	38.0	2.13	54.0	175	12	525	36	1.45
EF624-32	-32	2	51.0	2.87	73.0	175	12	525	36	2.20
EF624-40	-40	2.1/2	64.0	3.35	85.0	175	12	525	36	3.26
EF624-48	-48	3	76.0	3.94	100.0	175	12	525	36	3.90
EF624-64	-64	4	102.0	4.96	126.0	175	12	525	36	4.40

 **Temperature Range:** Continuous: -30°C to +70°C

EF 625 - BUNKER TRUCK HOT AIR BLOWER HOSE W.P. 10 BAR



Construction

- Core** Black colour, Synthetic rubber to withstand high temperature blower air
- Reinforcement** High Tensile Synthetic Textile Cord
- Cover** Black colour, Synthetic rubber resistant to ozone, weather and abrasion
- Application** For Hot dry oilness air feeding to bunker trucks for discharge of bulk material like Dry Cement, Fly Ash, Quarry Dust, Sand, etc., in construction industry

Item Code	Dash Size	ID		OD		WP		BP		W kg/m
		inch	mm	inch	mm	psi	bar	psi	bar	
EF625-32	-32	2	51.0	2.56	65.0	150	10	435	30	1.60
EF625-48	-48	3	76.0	3.62	92.0	150	10	435	30	2.80
EF625-64	-64	4	102.0	4.65	118.0	150	10	435	30	3.60

 **Temperature Range:** Continuous: -30°C to +180°C

PH 624 - SHOT BLASTING HOSE W.P. 12 BAR

Polyhose Proprietary Product



Construction

- Core** Black colour, Synthetic and natural rubber blend resistant to abrasion
- Reinforcement** High Tensile Synthetic Textile Cord with 2 cross anti static wire
- Cover** Black colour, Synthetic rubber resistant to ozone, weather and abrasion
- Application** Suitably designed long lasting heavy duty hose for use in sand, metal grits and foundry waste with conductive rubber compound to ensure static electricity dissipation abrasion loss of the tube according to ISO 4649: 50±5mm³

2

Item Code	Dash Size	ID		OD		WP		BP		W kg/m
		inch	mm	inch	mm	psi	bar	psi	bar	
PH624-08	-08	1/2	12.7	1.06	27.0	175	12	525	36	0.61
PH624-12	-12	3/4	19.0	1.34	34.0	175	12	525	36	0.80
PH624-16	-16	1	25.0	1.57	40.0	175	12	525	36	0.97
PH624-20	-20	1.1/4	32.0	1.89	48.0	175	12	525	36	1.32
PH624-24	-24	1.1/2	38.0	2.13	54.0	175	12	525	36	1.45
PH624-32	-32	2	51.0	2.87	73.0	175	12	525	36	2.20
PH624-40	-40	2.1/2	64.0	3.35	85.0	175	12	525	36	3.26
PH624-48	-48	3	76.0	3.94	100.0	175	12	525	36	3.90
PH624-64	-64	4	102.0	4.96	126.0	175	12	525	36	4.40



Temperature Range: Continuous: -30°C to +70°C

PH 625 - BUNKER TRUCK HOT AIR BLOWER HOSE W.P. 10 BAR

Polyhose Proprietary Product



Construction

- Core** Black colour, Synthetic rubber to withstand high temperature blower air
- Reinforcement** High Tensile Synthetic Textile Cord
- Cover** Black colour, Synthetic rubber resistant to ozone, weather and abrasion
- Application** For Hot dry oilness air feeding to bunker trucks for discharge of bulk material like Dry Cement, Fly Ash, Quarry Dust, Sand, etc., in construction industry

Item Code	Dash Size	ID		OD		WP		BP		W kg/m
		inch	mm	inch	mm	psi	bar	psi	bar	
PH625-32	-32	2	51.0	2.56	65.0	150	10	435	30	1.60
PH625-48	-48	3	76.0	3.62	92.0	150	10	435	30	2.80
PH625-64	-64	4	102.0	4.65	118.0	150	10	435	30	3.60



Temperature Range: Continuous: -30°C to +180°C